

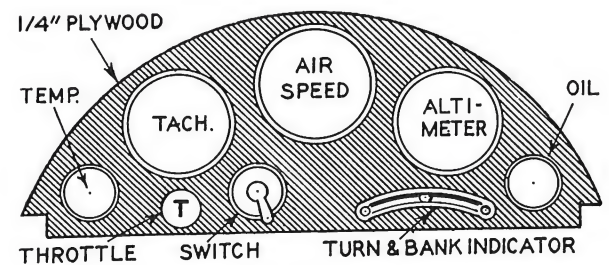


AIRFOIL SECTION- 2" SQUARES

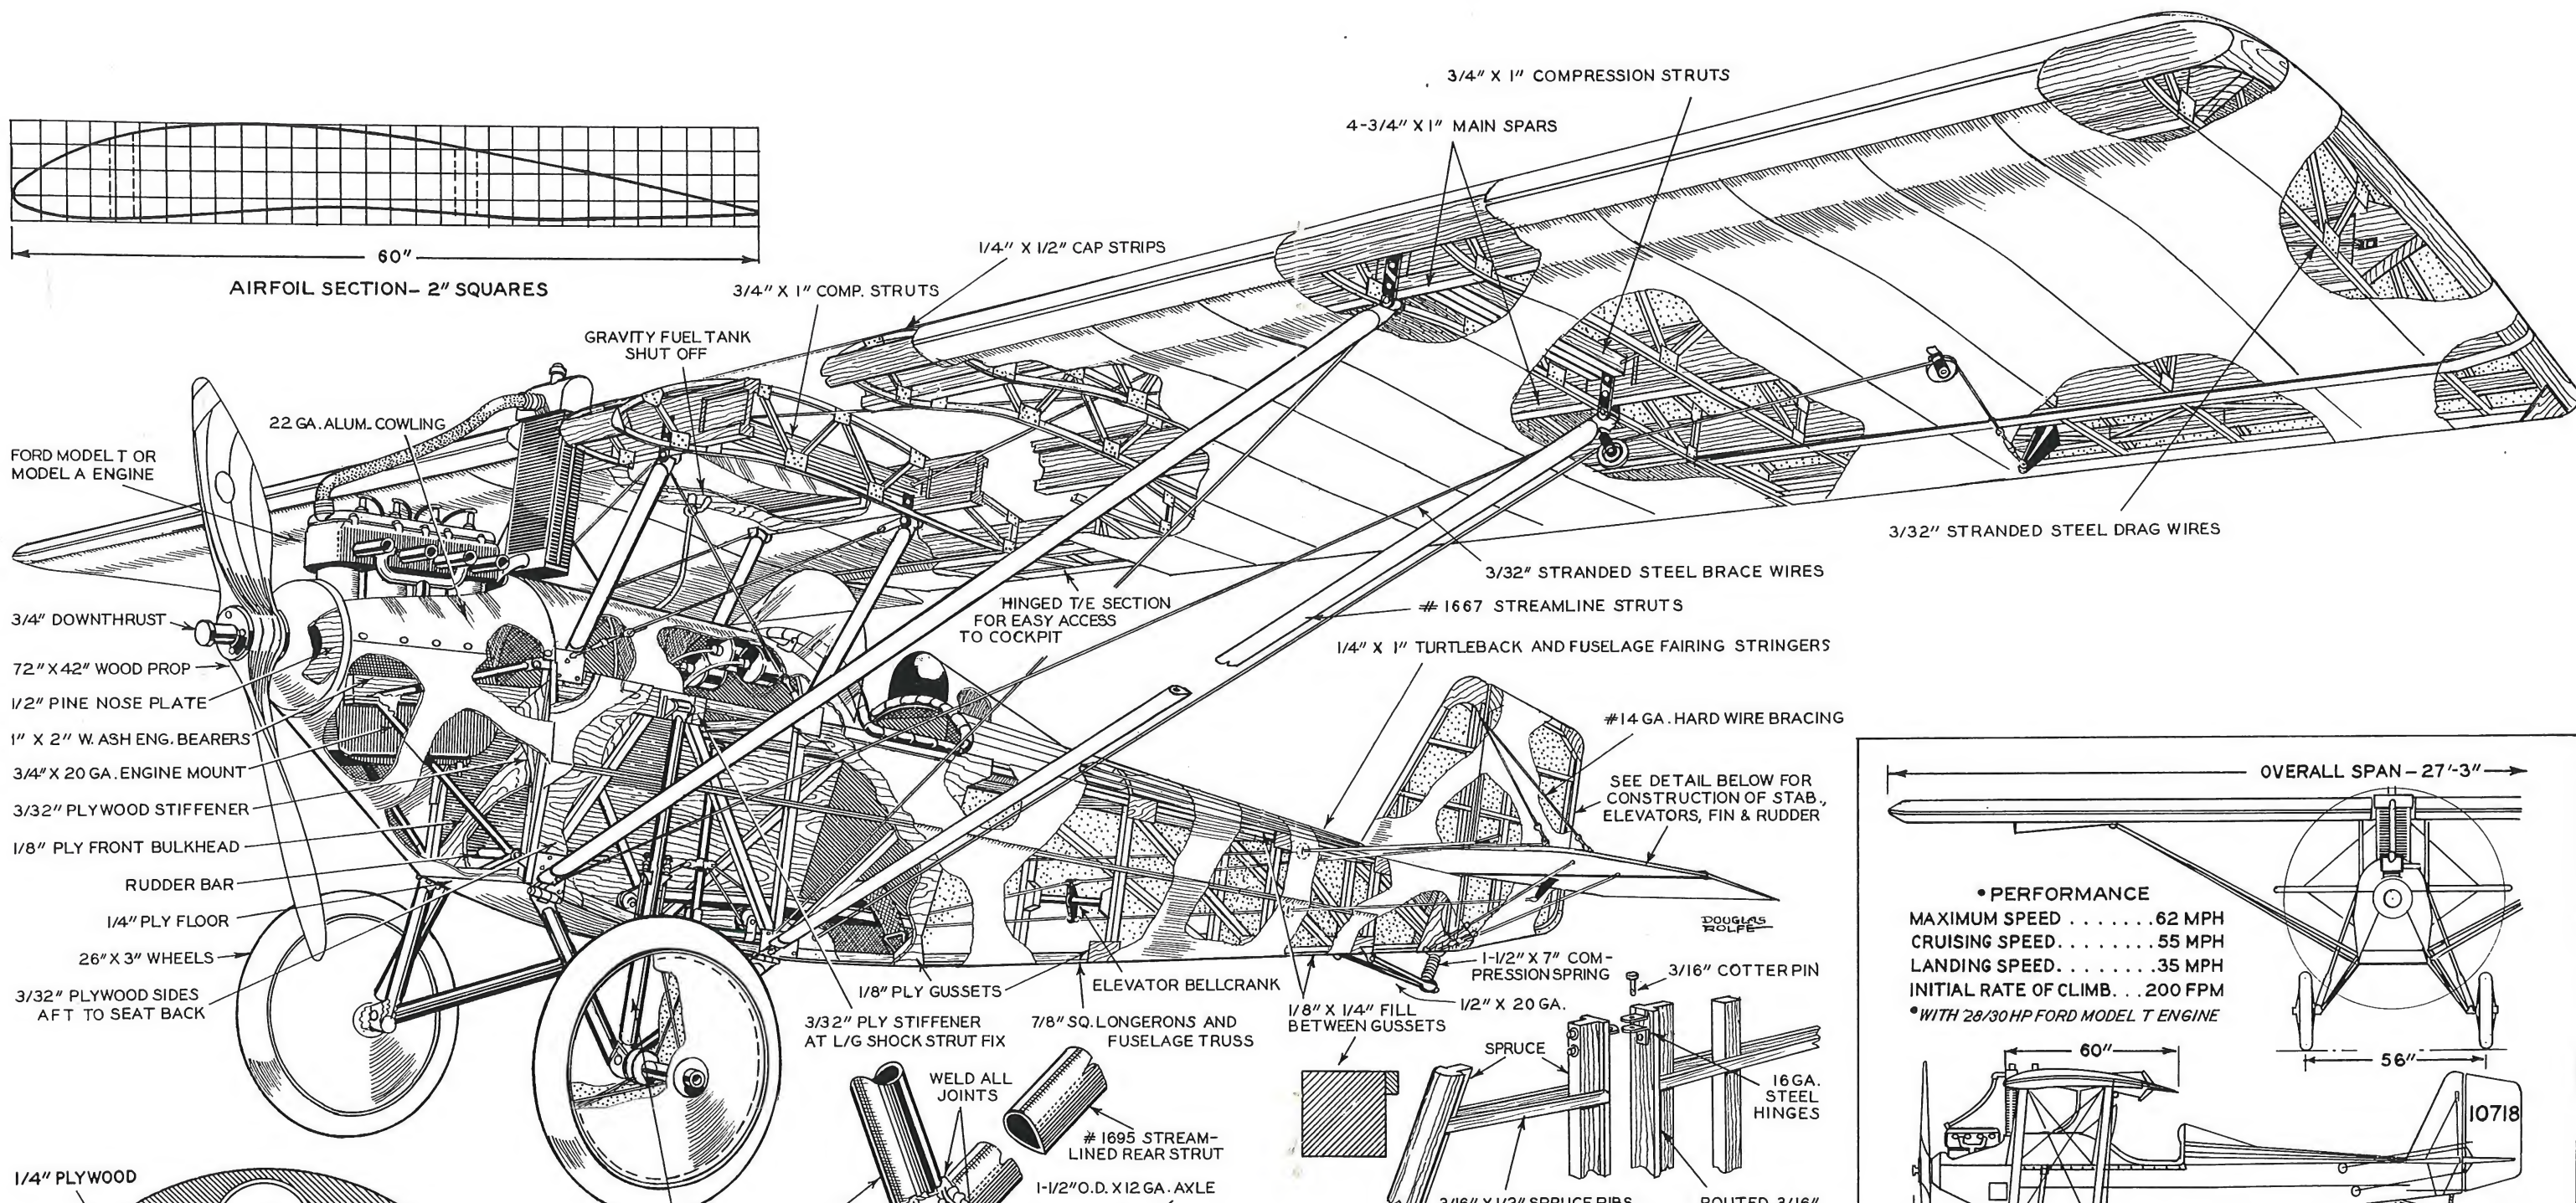


INSTRUMENT PANEL AND BASIC FLIGHT INSTR'MTS.


SPRING-LOADED SHOCK STRUT OR 1-1/2" X 18 GA. STRUT IF AIRWHEELS ARE EMPLOYED

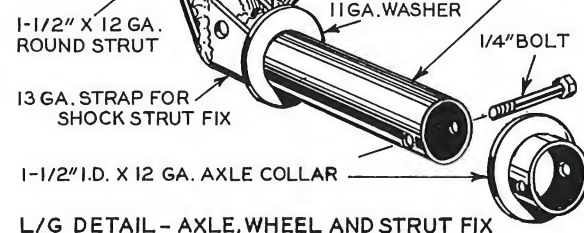

L/G DETAIL - AXLE, WHEEL AND STRUT FIX

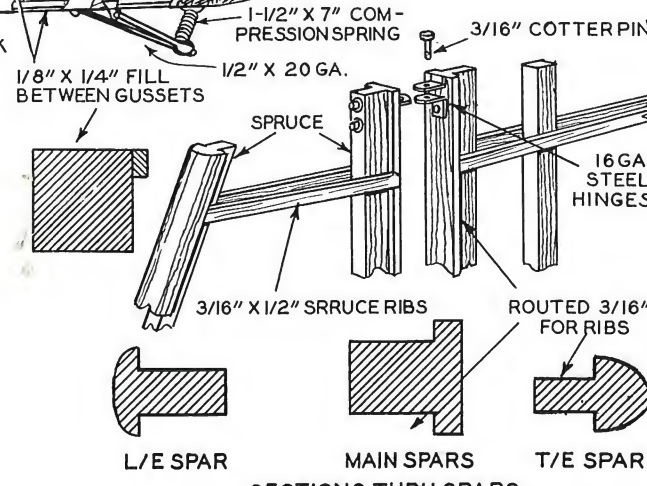

TYPICAL TAIL CONSTRUCTION & HINGE DETAILS

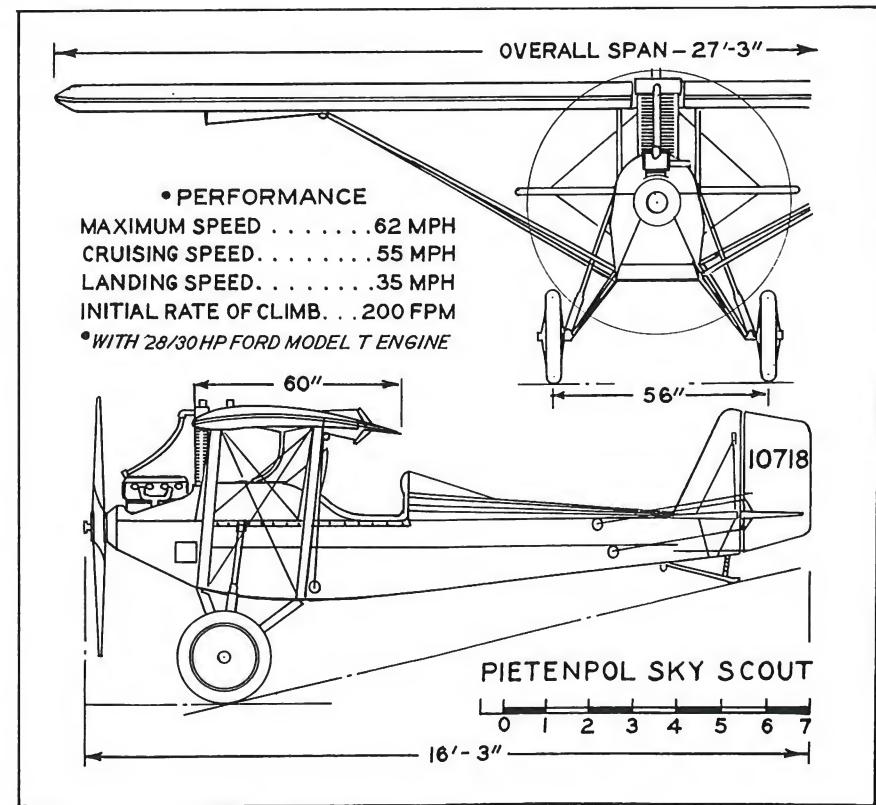

• PERFORMANCE
MAXIMUM SPEED 62 MPH
CRUISING SPEED 55 MPH
LANDING SPEED 35 MPH
INITIAL RATE OF CLIMB . . 200 FPM
* WITH 28/30 HP FORD MODEL T ENGINE

PIETENPOL SKY SCOUT

